



150mm CENTRALISER & SUPPORT Model No CE150



The 150mm Centraliser with flexible Brushes allows the Camera and its Spring Assembly along with the end of the Rod to be held up in mid air which makes it easier to glide over rough surfaces and keeping the Camera off the debris while not infringing on its flexibility. With this type of support for the Camera Head Assembly, it makes it easier to push further down a pipe with various bends as well as on retrieval. This type of dual support allows both of our Camera sizes (33mm and 46mm) to be incorporated in this Centraliser.

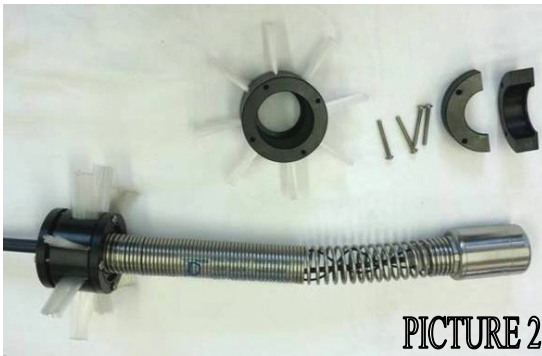

The Dual Centraliser is easy to install. (There are 4 x M4 screws 20mm long to secure the back ring to the Cable Brushed Assembly). Picture 1 shows the ring passing into the Camera and taken to the back. The 2 x shells are placed on the neck of the Rod. The remainder of the support along with the Brushes is passed over and secured to the ring. The front support for the Camera is placed over the Camera and the shells are secured with the back lip placed over the Camera back.

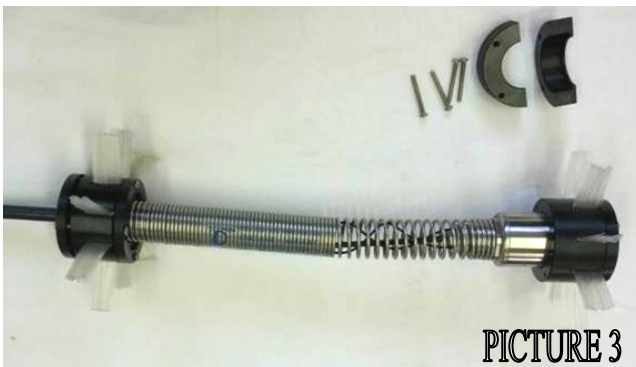

There are 4 x M4 screws 35mm long to secure the back ring to the Camera Support Brushed Assembly as seen in picture 3.

Picture 4 shows a 46mm Adaptor over the 33mm Camera. This is installed prior to installing the front Brush Assembly.



In picture 5, the complete assembly is shown for the 33mm Camera.

Once work is finished, please remove the Centraliser from the Camera and wash with fresh water.

